

PATENT ABSTRACTS OF JAPAN

(11)Publication number : **09-308882**

(43)Date of publication of application : **02.12.1997**

(51)Int.Cl.

C02F 1/44

B01D 63/08

B01D 65/02

(21)Application number : **08-126609**

(71)Applicant : **KUBOTA CORP**

(22)Date of filing : **22.05.1996**


(72)Inventor : **TANIDA MASAHIRO
YAMADA YUTAKA
IZUMI SELJI
NURISHI MASA HARU**

(54) WATER TREATMENT APPARATUS

(57)Abstract:

PROBLEM TO BE SOLVED: To ensure predetermined treatment quantity while putting the merit of gravitational filtering to practical use.

SOLUTION: When a plurality of membrane separators 1 are arranged within a treatment tanks 14, the membrane permeated soln. lead-out pipes 12 of the membrane separators 1 are respectively allowed to communicate with discharge pipes 16 opened to atmospheric pressure outside the tank at the position under the liquid surface of the tank and the suction pipes 17 communicating with a suction means. Opening and closing valves 19, 20 are provided to the pipes 16, 17. Usually, a water treatment apparatus is operated by a gravitational filter system hard to generate clogging and, when clogging is generated, the apparatus is changed over to emergency operation parallelly performing either one of gravitational filtering and suction filtering, gravitational filtering and backward washing and suction filtering and backward washing.

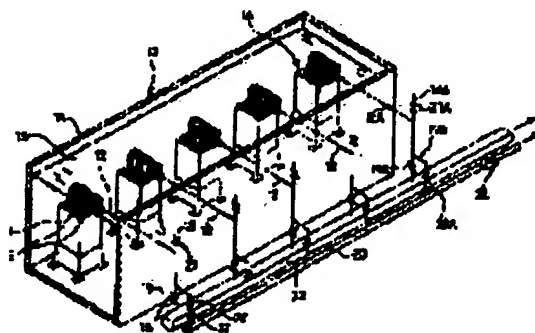

LEGAL STATUS

[Date of request for examination]	16.02.2000
[Date of sending the examiner's decision of rejection]	
[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]	
[Date of final disposal for application]	
[Patent number]	3333086
[Date of registration]	26.07.2002
[Number of appeal against examiner's decision of rejection]	
[Date of requesting appeal against examiner's decision of rejection]	
[Date of extinction of right]	

Copyright (C); 1998,2003 Japan Patent Office